

3-KW TQG...

## What Route Is Your Cable Taking?

I DON'T  
THINK THIS IS  
THE RIGHT  
ROUTE...




**T**he battery cable on your 3-KW tactical quiet generator might be taking the wrong route through a bad neighborhood. It's a neighborhood where the cable's protective covering can get nicked and rubbed away.

This wrong route is underneath the engine mounting plate. Traveling this way puts the battery cable in harm's way. Cuts and nicks to the insulation can lead to shorts in the equipment and shocks to you.

The right route is above the mounting plate.

Make sure your battery cables are taking the right route. To help them stay in place, use a single tie wrap to secure the battery cables to the top of the engine mounting plate.

Add this routing info to Para 4-45, battery cable maintenance, in TM 9-6115-639-13.

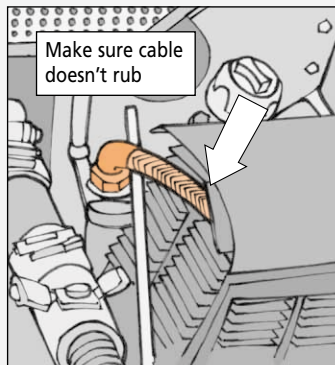

## Fuel Filter Savings

**I**f you're using NSN 2910-01-477-0840 to order a fuel filter element for your 3-KW tactical quiet generator, you're paying \$66 more than you need to and getting more parts than you bargained for.

According to TM 9-6115-639-23P, that NSN should bring you a fuel filter element. Instead it brings you the entire filter assembly!

Use NSN 4330-01-374-9147 to get only the fuel filter element. It will cost you around \$10.